



DT33G-SR-200 Series
二路分歧器


DT33G-SR-800 Series
八路分歧器

DT33G-SR-400 Series
四路分歧器

室外1 GHz 分歧器由下列組合:

- 5 MHz 到 1000 MHz 頻道容量
- 360 鋁合金殼
- 二倍潑麗烤漆
- 尼奧普防水護套
- RFI 編織鋼線
- A/B 膠密封 "F" 接頭
- 黃銅鍍鎳 "F" 接頭
- "F" 接頭有裝塑膠套
- "-SR-" TAP 分歧無過電力
- "-CB-" 能選擇 in/out 繼續的電力跟信號
- 二路跟四路用相同板
- 外箱裡面有小箱子;小箱子裡面有十個產品

	箱子數量	dB 數
DT33G-SR-200 Series	50 pcs	-04T,-08,-11,-14,-17,-20,-23,-26,-29,-32,-35 dB
DT33G-SR-400 Series	50 pcs	-08T,-11,-14,-17,-20,-23,-26,-29,-32,-35 dB
DT33G-SR-800 Series	40 pcs	-11T,-14,-17,-20,-23,-26,-29,-32,-35 dB

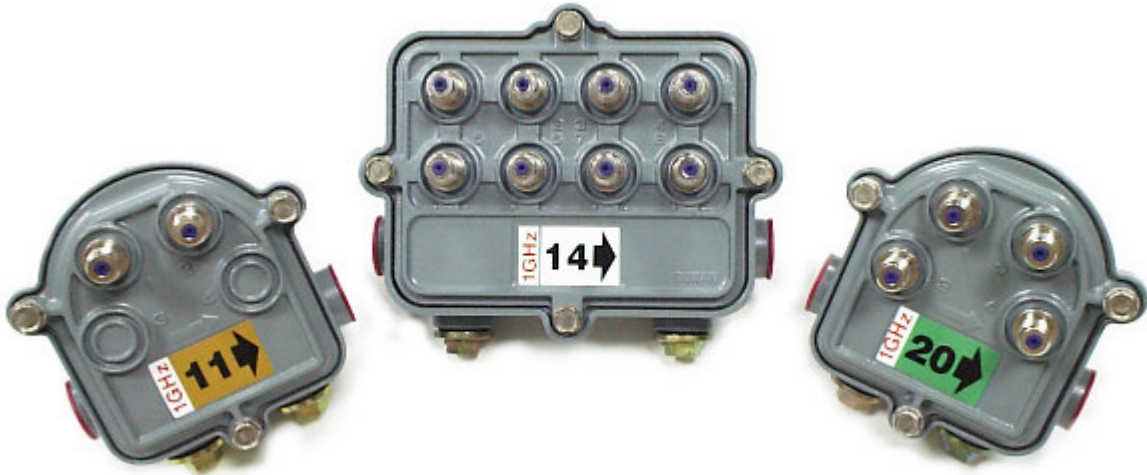

DT55G-SR-200 Series
二路分歧器

DT55G-SR-800 Series
八路分歧器

DT55G-SR-400 Series
四路分歧器

室外1 GHz 分歧器由下列組合:

- 5 MHz 到 1000 MHz 頻道容量
- 360 鋁合金殼
- 二倍潑麗烤漆
- 尼奧普防水護套
- RFI 編織鋼線
- A/B 膠密封 "F" 接頭
- 黃銅鍍鎳 "F" 接頭
- "F" 接頭有裝塑膠套
- "-SR-" TAP 分歧無過電力
- "-CB-" 能選擇 in/out 繼續的電力跟信號
- 二路跟四路用相同板
- 外箱裡面有小箱子;小箱子裡面有十個產品

	箱子數量	dB 數
DT55G-SR-200 Series	50 pcs	-04T,-08,-11,-14,-17,-20,-23,-26,-29,-32,-35 dB
DT55G-SR-400 Series	50 pcs	-08T,-11,-14,-17,-20,-23,-26,-29,-32,-35 dB
DT55G-SR-800 Series	40 pcs	-11T,-14,-17,-20,-23,-26,-29,-32,-35 dB

二路分歧器

5 - 1000 MHz

2 way

DT33/55G-SR-2xx Series Outdoor 2-Port Multitap

/二路分歧器

	5-10	11-20	21-400	401-500	501-600	601-900	901-1000
分歧-分歧隔離	18	23	25	25	23	21	19
回饋損失 (入/出/分歧)	15	18	20	18	17	16	16
損失誤差	± 2.0	± 1.0	± 1.0	± 1.0	± 1.3	± 1.7	± 2.0
過電	12 Amps AC/DC 60-90 Volts, 1-60 Hz						

Insertion Loss

/插入損失

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
04TdB	T	T	T	T	T	T	T	T	T	
08dB	3.4	3.5	3.6	3.8	4.0	4.3	4.3	4.4	4.5	dB
11 dB	1.6	1.6	1.6	1.6	2.0	2.3	2.8	3.0	3.8	dB
14 dB	1.0	1.0	1.1	1.2	1.3	1.5	2.0	2.5	3.0	dB
17 dB	0.9	1.0	1.0	1.1	1.2	1.4	1.5	1.8	2.0	dB
20 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	2.0	dB
23 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
26 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
29 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
32 dB	0.8	0.5	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
35 dB	0.8	0.5	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB

Output to Tap Isolation

/出到分歧隔離

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
04TdB	T	T	T	T	T	T	T	T	T	
08dB	18	23	23	22	21	21	19	19	18	dB
11 dB	18	23	23	22	21	21	19	19	18	dB
14 dB	20	23	21	20	20	20	19	19	18	dB
17 dB	26	30	30	30	30	30	28	28	25	dB
20 dB	30	30	30	30	27	27	25	25	23	dB
23 dB	35	33	31	32	31	29	27	26	22	dB
26 dB	38	35	34	33	30	30	26	26	25	dB
29 dB	40	42	42	40	39	39	30	30	27	dB
32 dB	42	44	44	42	41	41	32	32	31	dB
35 dB	44	45	45	44	43	43	32	32	32	dB

- 有的時候規格會改 v5.00



dt33g-sr-2xx series

dt55g-sr-2xx series

訂購說明:

DT G-SR-2 dB 數
33 或 55

	一箱數量	內箱數量	產品尺寸	產品重量
DTxxG-SR-2xx	50 pcs	10 pcs	91x76x91 mm	0.27 kgs

四路分歧器

5 - 1000 MHz



DT33/55G-SR-400 Series Outdoor 4-Port Multitap

/四路分歧器

	5-10	11-20	21-400	401-500	501-600	601-900	901-1000
分歧-分歧隔離	18	23	25	25	23	21	19
回饋損失 (入/出/分歧)	15	18	20	18	17	16	16
損失誤差	± 2.0	± 1.0	± 1.0	± 1.0	± 1.3	± 1.7	± 2.3
過電	12 Amps AC/DC 60-90 Volts, 1-60 Hz						

Insertion Loss

/插入損失

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
4 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
08T dB	T	T	T	T	T	T	T	T	T	
11 dB	3.3	3.5	3.6	3.7	4.1	4.1	4.4	4.4	4.5	dB
14 dB	1.6	1.6	1.7	1.8	2.0	2.3	2.5	3.0	3.8	dB
17 dB	1.0	1.0	1.1	1.2	1.3	1.5	2.0	2.5	3.0	dB
20 dB	1.2	1.0	1.0	1.1	1.2	1.4	1.5	1.8	2.0	dB
23 dB	1.2	0.7	0.8	1.0	1.1	1.2	1.4	1.5	1.8	dB
26 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
29 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
32 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
35 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB

Output to Tap Isolation

/出到分歧隔離

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
4 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
08T dB	T	T	T	T	T	T	T	T	T	
11 dB	18	23	23	22	21	21	19	19	18	dB
14 dB	20	20	21	20	20	20	19	19	18	dB
17 dB	26	26	23	23	21	20	19	19	18	dB
20 dB	33	35	32	30	27	27	25	25	23	dB
23 dB	35	34	31	31	29	28	26	25	24	dB
26 dB	38	35	34	33	30	30	26	26	25	dB
29 dB	40	42	42	40	39	39	30	30	27	dB
32 dB	42	44	44	42	41	41	32	32	31	dB
35 dB	44	45	45	44	43	43	32	32	32	dB

- 有的時候規格會改 v5.00

訂購說明:

DT G-SR-4 dB 數
 33 或 55



	一箱數量	內箱數量	產品尺寸	產品重量
DTxxG-SR-4xx	50 pcs	10 pcs	91x76x91 mm	0.27 kgs

八路分歧器

5 - 1000 MHz



DT33/55G-SR-800 Series Outdoor 8-Port Multitap

/八路分歧器

	5-10	11-20	21-40	401-500	501-600	601-900	901-1000
分歧-分歧隔離	18	23	25	25	23	21	19
回饋損失 (入/出/分歧)	15	18	20	18	17	16	16
損失誤差	± 2.0	± 1.5	± 1.0	± 1.0	± 1.3	± 1.7	± 2.5
過電	12 Amps AC/DC 60-90 Volts, 1-60 Hz						

Insertion Loss

/插入損失

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
4 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
8 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
11T dB	T	T	T	T	T	T	T	T	T	
14 dB	3.2	3.6	3.7	3.7	3.9	4.2	4.3	4.4	4.5	dB
17 dB	1.8	1.8	2.0	2.0	2.2	2.4	2.8	3.3	3.8	dB
20 dB	1.1	1.0	1.0	1.2	1.5	1.6	2.0	2.5	3.0	dB
23 dB	1.0	1.0	1.0	1.1	1.2	1.4	1.5	1.8	2.2	dB
26 dB	1.0	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
29 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
32 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB
35 dB	0.8	0.7	0.8	1.0	1.1	1.2	1.3	1.5	1.8	dB

Output to Tap Isolation

/出到分歧隔離

	5-50	51-300	301-400	401-500	501-600	601-700	701-800	801-900	901-1000	MHz
4 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
8 dB	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
11T dB	T	T	T	T	T	T	T	T	T	
14 dB	18	25	25	25	23	22	20	20	18	dB
17 dB	18	20	23	23	21	20	19	19	18	dB
20 dB	26	26	23	21	20	20	19	19	18	dB
23 dB	31	35	33	33	32	32	28	28	27	dB
26 dB	35	35	34	33	30	30	26	26	25	dB
29 dB	38	40	35	34	33	33	30	30	27	dB
32 dB	40	42	42	42	41	41	32	32	31	dB
35 dB	42	43	44	44	43	43	32	32	32	dB

- 有的時候規格會改 v5.00

訂購說明:

DT G-SR-8
dB 數
33 或 55



dt33g-sr-8xx series



dt55g-sr-8xx series

	一箱數量	內箱數量	產品尺寸	產品重量
DTxxG-SR-8xx	40 pcs	10 pcs	133x75x108 mm	0.45 kgs